

JOW-2D


Two Door Adaptor for the JO Series

-INSTRUCTIONS-

The JOW-2D is an adaptor for the JO Series video intercom system that will allow two video door stations to be on the system. The adaptor has inputs for two JO video door stations and outputs to control door release for each of those door stations. When either door station calls in, that image will be displayed on the inside station(s). The person inside answers the call, and when pushing the door release button, only the associated door release mechanism will trigger. If one door station is in use, the call button on the other door station will not activate a call-in.

Note: Only door 1 can be monitored by the master station. Answering stations and mobile apps only talk to door 2 when it calls them. The JO Series with a JOW-2D is not suitable for man trap applications.

WIRING

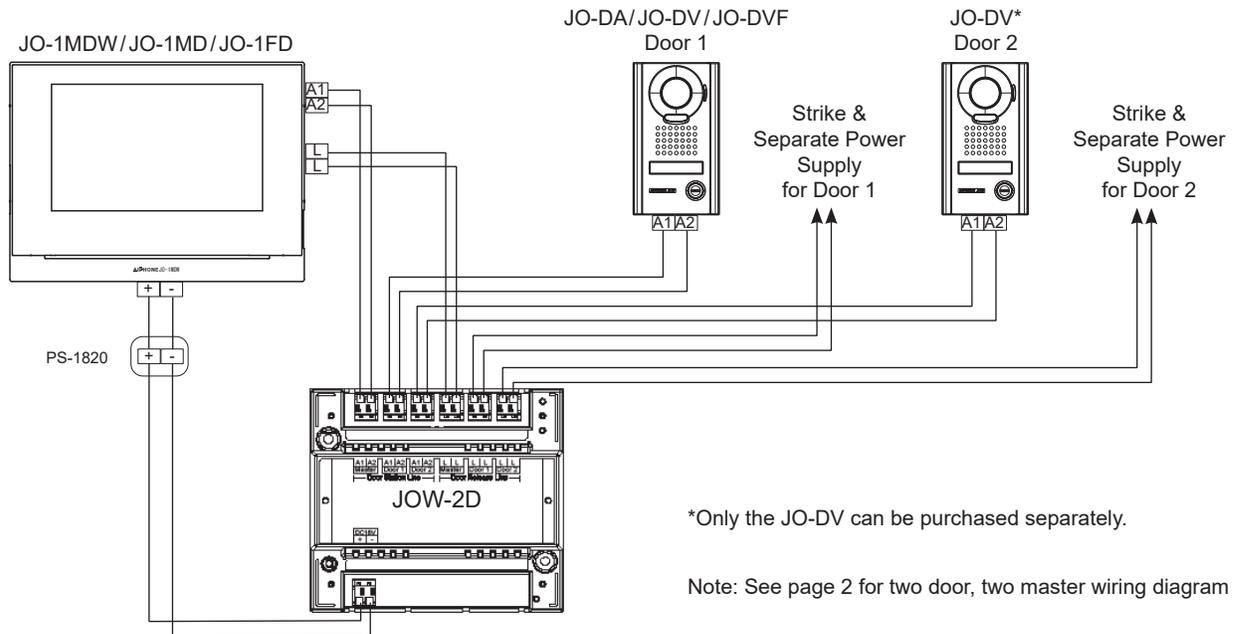

SPECIFICATIONS

Power:	18V DC (share PS-1820UL/PS-1820DM with JO master station)
Current consumption:	100mA (max), 18mA (standby)
Relay Outputs (Form A, Dry):	When using JO-1MDW only: 24V DC, 1A When using JO-1MD or JO-1FD: 24V DC, 500mA
Operating Temperature:	32° ~ 104° F (0° ~ 40°C)
Mounting:	Mount to W-DIN11 (sold separately)
Dimensions:	10.8 cm (4-1/4") H x 12.2 cm (4-13/16") W x 6 cm (2-3/8") D
Distance:	Max distance from door to master is 100 m (330')

2 Doors, 2 Masters with JOW-2D

